

Compatibility

- DVL GSR NB Insert (US or AU)

Packing List


- DVL Ember-Fyre Burner Assembly (with air shield)
- Left and Right Ember Trays
- 7-Piece Log Set
- Bag of Rock Wool
- Bag of Log Embers

Burner Installation


! **If using propane (LP), convert the appliance before installing the burner and logs.**

- 1 Access the firebox.
- 2 Leave the air shield in place for NG (natural gas). Remove and discard the air shield for LP (propane).

NG

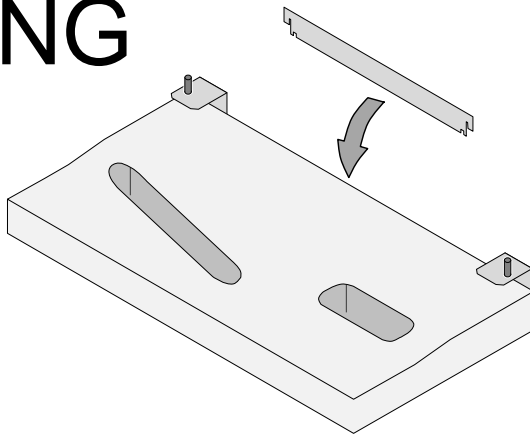


LP

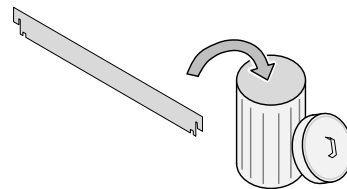

- 3 Install the burner. Install the side ember trays.

NOTE: Make sure the burner is fully seated over the orifices (the burner should be aligned all the way to the right).

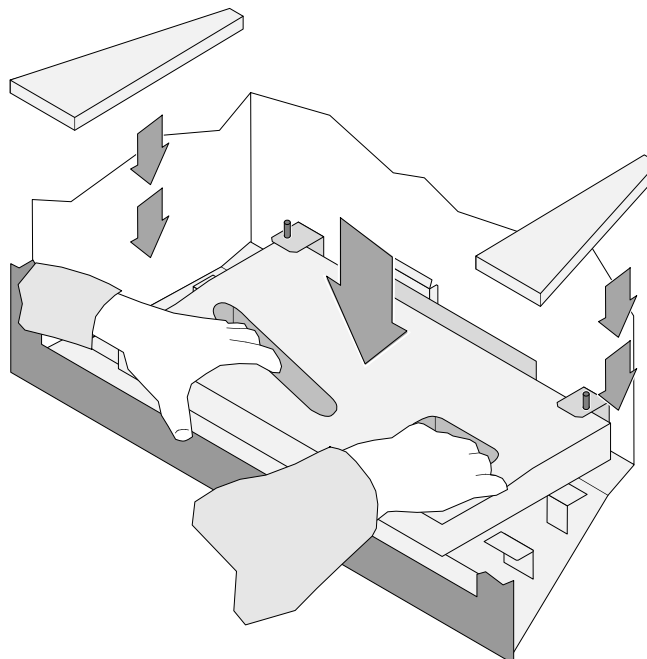


Log Set Installation

- ! **The logs are fragile, especially after being exposed to heat.**
- Make sure the gas control valve is "OFF" and the heater is cool prior to conducting service.
- Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.
- The burner must be correctly positioned before installing the logs. Make sure the burner is fully seated and the pilot is properly aligned.

Rear Log Placement

The rear log has two holes on the bottom. Place the log so the pins on the burner insert into the holes on the log (see photos below).

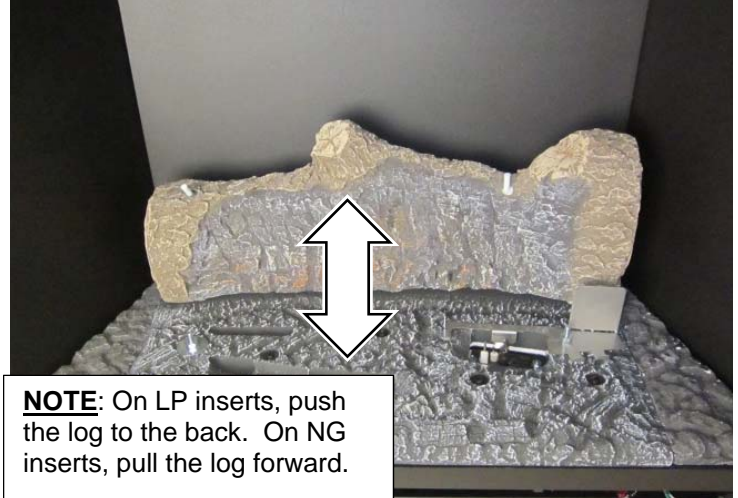

Left Front Log Placement

The left front log has a hole on the bottom. Place the log so the pin on the burner inserts into the hole on the log (see photos below).



Right Front Log Placement

The right front log has a hole on the bottom. Place the log so the pin on the burner inserts into the hole on the log (see photos below). Note how the bracket on the burner keeps it correctly positioned.



Left Twig Placement

The left twig has two holes on the bottom. Place the twig so the pins on the rear and left front log insert into the holes on the log (see photos below).



Right Twig Placement

The right twig has two holes in the bottom – only the top hole is used. Place the right twig as shown below. Note how the twig rests on the top of the right front log.



NOTE: This hole is not used.



Front Left Twig Placement

Place the front left twig on the burner as shown below. Make sure it does not cover any burner holes.



Front Right Twig Placement

Place the front right twig on the burner as shown below. Make sure it does not cover any burner holes.



Ember Placement

Place a layer of embers along any screw heads and visible edges of the burner.



Rockwool Installation

The included rock wool is placed on top of the burner to enhance the glow from the burner. **The rock wool works best when it is applied in a very thin, porous layer.** The best method for applying the rock wool is to brush it on to the burner. Compress a clump of rockwool between your thumb and forefinger. Use a stiff brush to apply a thin layer of rockwool fibers onto the burner. Do not use the entire bag of rockwool. Use only a small amount and save the remainder. Over-use of rockwool will diminish the glow and may cause sooting or other adverse conditions.

